

Technical Data Sheet M Series

Basic Info

KSF M 89x2100-M24	KSF M 89x1600-M24	KSF M 89x1300-M24
Nominal length (mm)		
2100	1600	1300
Tube diameter (mm)		
88.90	88.90	88.90
Weight (kg)		
18.00	14.00	11.50
Item number		
25302	25301	25300

Construction

- Flange: Sheet metal S355
- Nut: DIN EN ISO 4032-8
- Continuous welded helix
- Coating: Hot-dip galvanized according to DIN EN ISO 1461

Applications



KSF M 89x
1600-M24


Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com

efficient · no concrete · durable

Technical Data

	KSF M 89x2100-M24	KSF M 89x1600-M24	KSF M 89x1300-M24
a	Length (mm) (± 25 mm)		
	2080	1580	1280
b	Shaft outer diameter (mm)		
	88.90	88.90	88.90
c	Inner diameter (mm)		
	81.70	81.70	81.70
d	Thread		
	M24	M24	M24
e	Pitch circle diameter (mm)		
	150	150	150
f	Pitch circle holes (mm)		
	6 x $\varnothing 14$	6 x $\varnothing 14$	6 x $\varnothing 14$
g	Flange wrench size (mm)		
	160	160	160
h	Flange outer diameter (mm)		
	182	182	182
i	Flange thickness (mm)		
	10	10	10

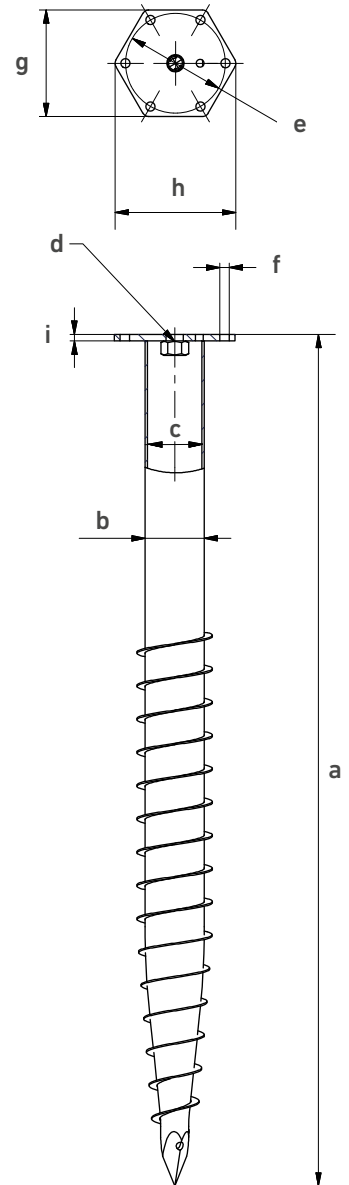

Online Service

KSF M 89x2100-M24	KSF M 89x1600-M24	KSF M 89x1300-M24
-------------------	-------------------	-------------------

Webkey

M2530211D

M2530111D

M2530011D



Subject to technical change!

Krinner Schraubfundamente GmbH | Passauer Straße 55 | D-94342 Straßkirchen
Phone: +49 9424 9401-80 | E-Mail: service@krinner.com | www.krinner.com